



Material: Hot Dip Galvanized I.S 918 (H.D.G.A.F) Standard: Din 17100 ST 37.2 2 [mm]

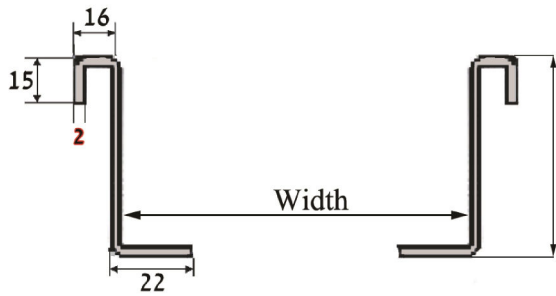


Side Profile

88

Width apply for each model of cable ladder [mm]

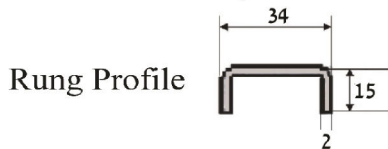

Rung Profile

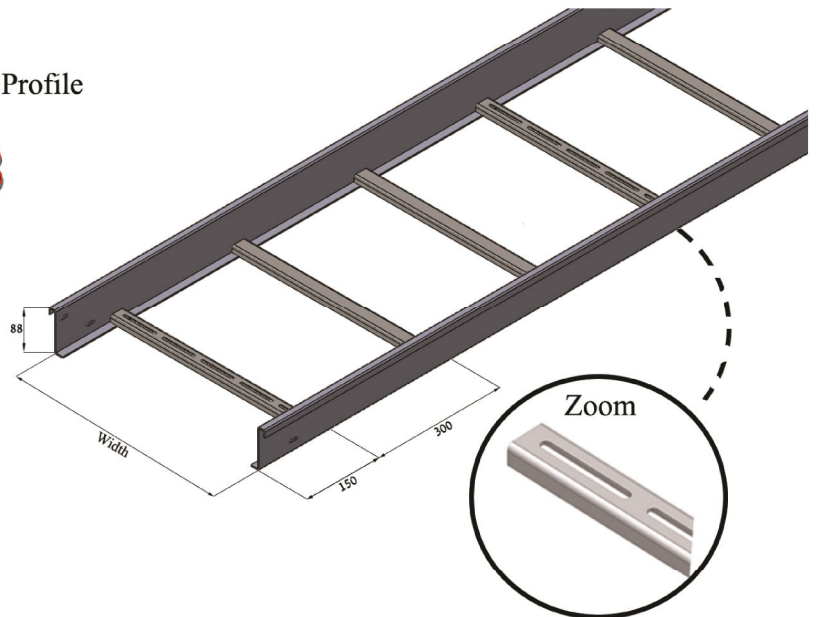


Ladder

Supply Length 3000 [mm]

Model	Width [mm]	Price ₪/m
M - 95	95	77
M - 195	195	80
M - 295	295	85
M - 395	395	89
M - 495	495	93
M - 595	595	101

Allowable Load [Kg/m]

Distance Between Supports [m]

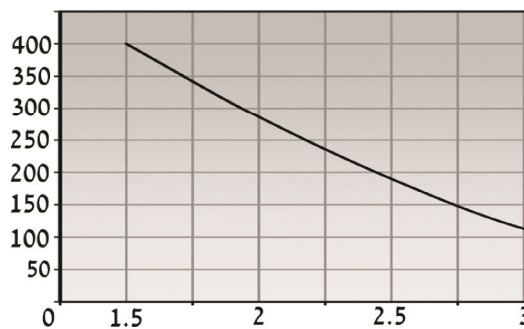


Ladder must be anchor supported to structure

Cover: Galvanized 1.2 [mm]


Supply Length 1500 / 3000 [mm]

Model	Width [mm]	Price ₪/m
CM - 95	130	42
CM - 195	230	53
CM - 295	330	62
CM - 395	430	76
CM - 495	530	85
CM - 595	630	94

Assembly Ladder & Cover + Attachment



Cover Material Standard EN-10346 G-275

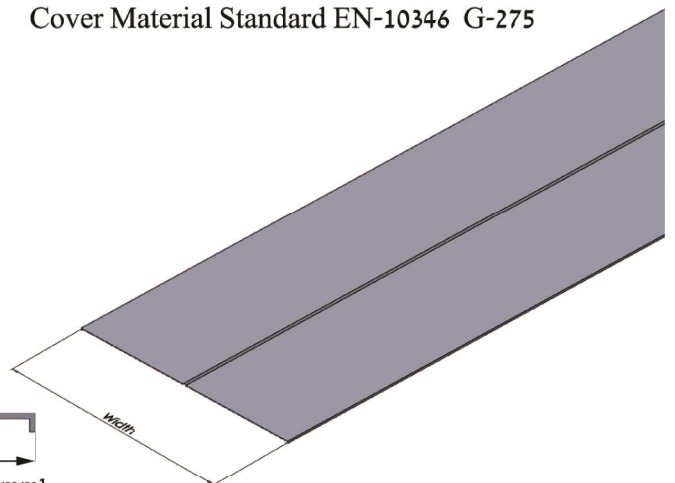

Width apply for each cover model [mm]



04-8411142 , 04-8414834 FAX 04-8414528

www.naor.co.il naor_ltd@netvision.net.il

Copyright © all rights reserved Naor L.T.D

